

EXLITE LA4

LED

Type A Sign Light

230V

EL-LA4-LED4

Specification:

Conforms to BS EN 12899-1:2007

Case material: Polypropylene grey as standard (black option)
 Lens material: High impact polycarbonate hinged lens
 Ingress protection: IP56
 Corrosion resistance: SP1
 Fixings: M6 x 20mm Anti-corrosion, Anti-Rotational

Mounting options: 20mm diameter bracket arm
 Bracket arm options: 175mm outreach for up to 900mm x 900mm illumination
 300mm outreach for up to 1000mm x 1000mm illumination
 76mm / 89mm / 114mm / 140mm / 168mm diameter post top
 TESPAs (banding or clamp)

Compatibility: Built in photocell window
 Photocell (optional)

Gear Tray: 3 LED gear tray complete with quick connect plug + socket
 Nominal life expectancy: 50,000+ hrs.
 Voltage: 230 VAC
 Power consumption: 5w
 Power factor correction: ≥ 0.9


Colour rendering index: RA60

Charge code: 40 0005 0004 100

Recyclable: Yes

Warranty: www.mallatite.co.uk/certificates-warranty

Maintenance: Clean external surfaces with a diluted mild detergent as required, paying particular attention to the lens and photocell window.

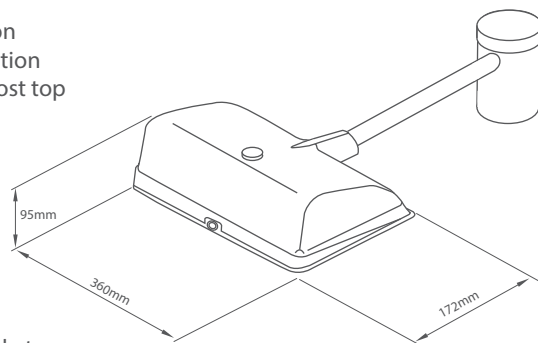

Bracket Arm 175mm	Mean Illuminance	Uniformity of illuminance:
300mm circle	E3	UE3
450mm circle	E2	UE3
600mm circle	E2	UE1
750mm circle	E2	UE1
600mm triangle	E2	UE1
750mm triangle	E2	--